




**ENGINEERED POWER LP**

# LIRDD-165HT

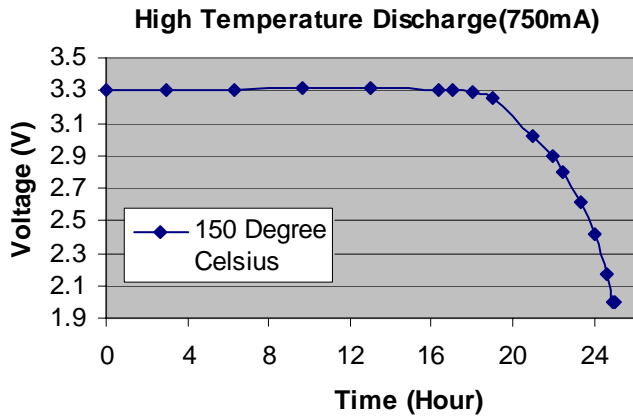

**Primary  
High Energy  
High Temperature  
High Rate  
Lithium Thionyl Chloride  
Custom Terminations**

## TECHNICAL DATA:

**Capacity:** 18.0 Ah

**Rated Current:** 750 mA

**Voltage:** 3.67 V (Open Circuit)

**Operating Temperature:** -40°F to +329°F (-40°C to +165°C)

**Physical Dimensions:** 5.00 inch (126.2 mm) x 1.25 inches (31.8 mm) diameter

**Weight:** 6.3 ounces (180 grams ±5 grams)

**Suitable Applications:** Measurement While Drilling (MWD), Oil Well Instrumentation,  
Logging While Drilling (LWD)

**ENGINEERED POWER LP**  
**WHEN PERFORMANCE COUNTS**

#109, 1120 – 53<sup>rd</sup> Ave N.E.  
Calgary, Alberta, T2E 6N9  
Canada

Phone: (403)235-2584

Fax: (403)235-2590

Web: <http://www.engineeredpower.com>

*Updated: March 2006*