




**ENGINEERED POWER LP**

## LIRDD-HTS

High Temperature Discharge  
750mA, 150C

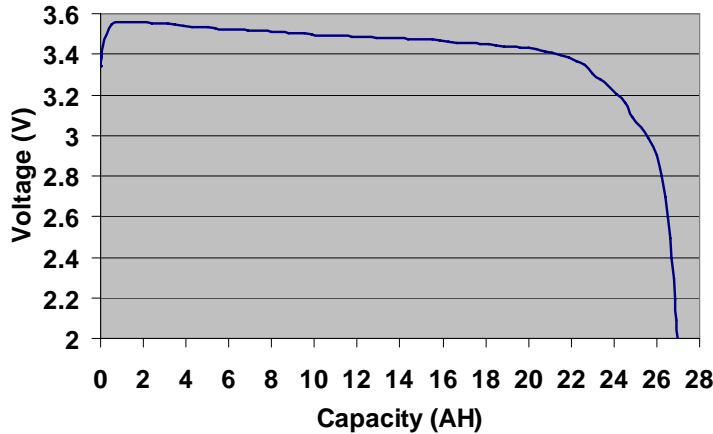

**Primary  
High Energy  
High Temperature  
High Rate  
Lithium Thionyl Chloride  
Custom Terminations**

### TECHNICAL DATA:

**Capacity:** 27.0 Ah

**Rated Current:** 750 mA

**Voltage:** 3.67 V (Open Circuit)

**Operating Temperature:** -40°F to +302°F (-40°C to +150°C)

**Physical Dimensions:** 5.00 inch (126.2 mm) x 1.25 inches (31.8 mm) diameter

**Weight:** 7.5 ounces (212 grams ±5 grams)

**Suitable Applications:** Transceivers, Sonobuoys, Memory Backup, Oil Well  
Instrumentation, Measurement While Drilling (MWD), Logging  
While Drilling (LWD), High Shock & Vibration Application.

**ENGINEERED POWER LP**  
**WHEN PERFORMANCE COUNTS**

#20, 3103 – 14th Ave N.E.  
Calgary, Alberta, T2A 7N6  
Canada

Phone: (403)235-2584  
Fax: (403)235-2590  
Web: <http://www.engineeredpower.com>

*Updated: December 2009*