




ENGINEERED POWER LP

LMR21MM-165HT

High Temperature Discharge
150mA, 165C

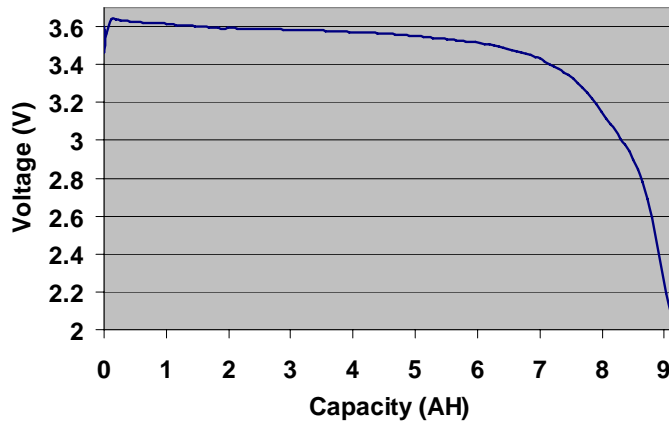

**Primary
High Energy
High Temperature
Moderate Rate
Lithium Thionyl Chloride
Custom Terminations**

TECHNICAL DATA:

Capacity: 9.0 Ah

Rated Current: 150 mA

Voltage: 3.67 V (Open Circuit)

Max Current: 300 mA

Operating Temperature: -40°F to +329°F (-40°C to +165°C)

Physical Dimensions: 3.95 inch (100.3 mm) x 0.815 inches (20.7 mm) diameter

Weight: 2.54 ounces (70 grams ±5 grams)

Suitable Applications: Measurement While Drilling (MWD), Down Hole & Pressure Gauge Applications, Memory Backup.

ENGINEERED POWER LP
WHEN PERFORMANCE COUNTS

#20, 3103 – 14th Ave N.E.
Calgary, Alberta, T2A 7N6
Canada

Phone: (403)235-2584
Fax: (403)235-2590
Web: <http://www.engineeredpower.com>

Updated: November 2010