




**ENGINEERED POWER LP**

# LMR21MM-180HT

High Temperature Discharge  
150mA, 180C

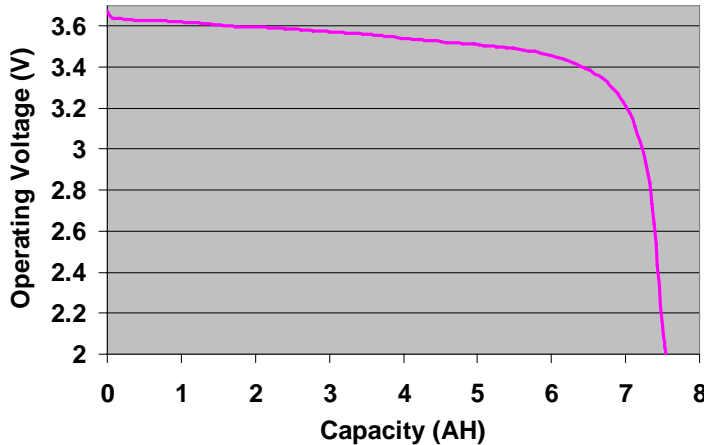

**Primary  
High Energy  
Extreme High Temperature  
Moderate Rate  
Lithium Thionyl Chloride  
Custom Terminations**

## TECHNICAL DATA:

**Capacity:** 7.0 Ah

**Rated Current:** 150 mA

**Voltage:** 3.67 V (Open Circuit)

**Max Current:** 300 mA

**Operating Temperature:** 104°F to +356°F (40°C to +180°C)

**Physical Dimensions:** 3.95 inch (100.3 mm) x 0.815 inches (20.7 mm) diameter

**Weight:** 2.47 ounces (72 grams ±5 grams)

**Suitable Applications:** Measurement While Drilling (MWD), Down Hole & Pressure Gauge Applications, Memory Backup.

**ENGINEERED POWER LP**  
**WHEN PERFORMANCE COUNTS**

#20, 3103 – 14<sup>th</sup> Ave N.E.  
Calgary, Alberta, T2A 7N6  
Canada

Phone: (403)235-2584  
Fax: (403)235-2590  
Web: <http://www.engineeredpower.com>

Updated: March 2011