




ENGINEERED POWER LP

LMRDD-DA-200HT

Capacity vs Temperature
300mA Discharge

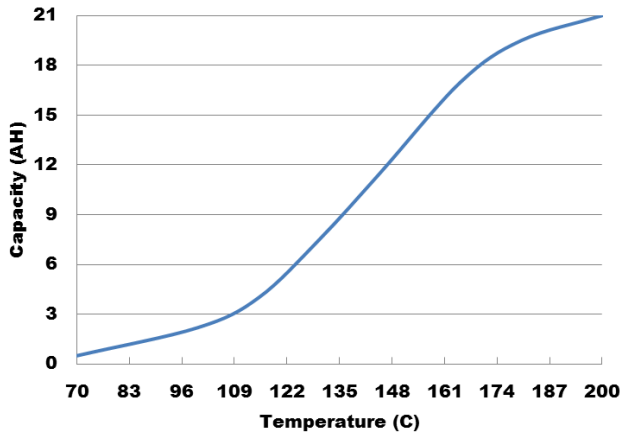

**Primary
High Energy
Extreme High Temperature
Moderate Rate
Lithium Thionyl Chloride
Custom Terminations**

TECHNICAL DATA:

Capacity: 21.0 Ah

Rated Current: 300 mA

Voltage: 3.67 V (Open Circuit)

Max Current: 600mA

Operating Temperature: 158°F to +392°F 70°C to +200°C

Physical Dimensions: 5.0 inch (12.62cm) x 1.25 inches (3.18cm) diameter

Weight: 6.3 ounces (179 grams ±5 grams)

Suitable Applications: Measurement While Drilling (MWD), Logging While Drilling (LWD)
Oil Well Instrumentation

ENGINEERED POWER LP

WHEN PERFORMANCE COUNTS

#20, 3103 – 14th Ave N.E.
Calgary, Alberta, T2A 7N6
Canada

Phone: (403)235-2584
Fax: (403)235-2590
Web: <http://www.engineeredpower.com>

Updated: July 2011